

Docket# 297-009077-US (PAR) 09/458,906

METHOD TO DETERMINE . : Lilja Harri Page

Inventor:

Page # 1




Fig. 1

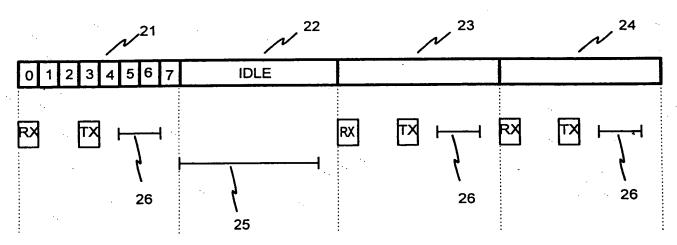


Fig. 2



Doc## 297-009077-US (PAR) S/N 09/458,906


Title: METHOD TO DETERMINE .


Inventor: Lilja Harri

Page # 2 of 4

MS RX RX RX RX3 4 6 RX 5 MS TX 5 6 7 0 TX TX 5 Monitoring 33 32

Fig. 3

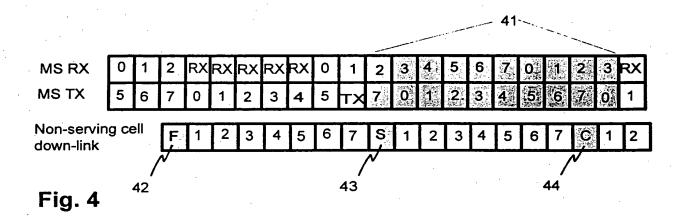

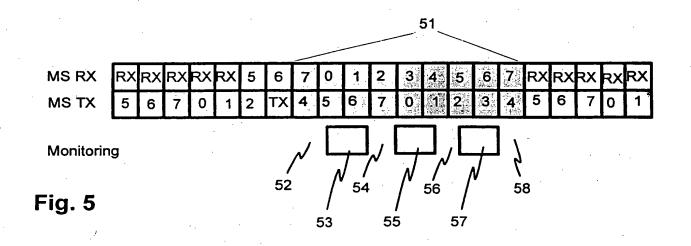

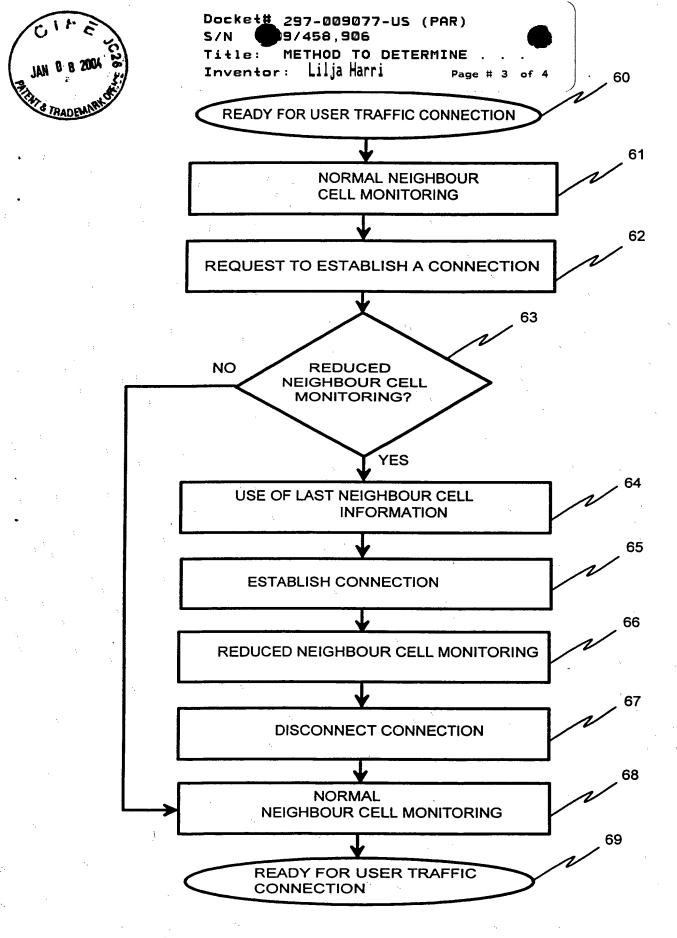


Fig. 6



Docke 297-009077-US (PAR) S/N 09/458,906

Title: METHOD TO DETERMINE

76

77

Inventor: Lilja Harri Page # 4

85 81 80 82 83 RF-Generate Inter-Information Channel GMSKburst transleaving source encoder modulation 87 mitter requency Rx/Tx-**CONTROL UNIT** synthetiswitch siser 86 Detection Deinter-RF-Utilisation of Channel A/Dde-**←** leaving receiver information decoder converter modulation

75

74

Fig. 7

78